



Fastener, Safety & Strut Specialists

Paint Marking Sealants Adhesives



ST PAUL

- 651-646-6374
- 800-328-6505

DULUTH

- 218-624-4851
- 800-232-1367

FOREST LAKE

- 651-756-8758
- 800-328-6505

2025



Viking Industrial Center is a family-owned business that has served thousands of companies and customers since 1959. Viking started out in the heart of the Twin Cities by selling fastening tools and equipment for construction. Shortly thereafter we added a full line of safety products. The two product lines worked in tandem, providing a broad array of quality construction fastening and safety products at reasonable prices with personalized service. Finally, a full line of strut products was added.

Viking has three convenient Minnesota locations. Our St. Paul and Columbus stores service walk-in customers in the Twin Cities metro area and suburbs. Our Duluth location is easily accessible to customers in northern Minnesota and northwestern Wisconsin.

Our service representatives can visit you at your site.

Unable to stop in? Place your order online through our website. We have in-stock inventory ready to ship out immediately. If you don't see what you are looking for, please give us a call. We have a very knowledgeable customer service staff waiting to assist you!

We take pride in our company and enjoy giving advice on products and helping our customers find what is right for them and their situations. Please contact us with any questions about our company or our products.

Viking Industrial Center Offers Jobsite Service



Customer Service Centers

**Store Hours: 7:00 a.m. - 4:00 p.m.
Monday - Friday**

St. Paul
2550 Kasota Avenue
(800) 328-6505
Phone (651) 646-6374
Fax (651) 646-7546
info@vikingindustrialcenter.com

Forest Lake
9205 Lake Drive NE
(800) 328-6505
Phone (651) 756-8758
Fax (651) 797-2942
info@vikingindustrialcenter.com

Duluth
4730 Grand Avenue
(800) 232-1367
Phone (218) 624-4851
Fax (218) 624-4788
info@vikingindustrialnorth.com

PLEASE NOTE: No expressed or implied warranties are made in this catalog.
Specifications are subject to change without notice.
Please call Viking Industrial Center at 1-800-328-6505 for current product data.

TERMS OF SALE

Payment: Net 30 days from invoice date.

FOB: Shipping Point.

Transportation: We will determine the best methods for transportation unless specified in order.

Returned Goods: Goods may be returned for credit, exchange or replacement only with authorization and subject to inspection and restocking charge.

Special & Custom Items: Special order and custom-made items become the property of the buyer and ARE NON-RETURNABLE.

New Accounts: In order to expedite shipments to new accounts, payment in full must accompany order. We do not make COD shipments.

Prices: All prices are subject to change or withdrawal without prior notice.

Credit Cards: We accept for credit card purchases



NOTICE: There is a minimum purchase of \$10 per order.

As our valued customer, you expect us to supply quality merchandise from reputable manufacturers at a fair market price, to ship and invoice your orders as rapidly as possible and to service what we sell.

As your supplier, we expect you to pay all bills according to our invoice terms, give us a reasonable amount of time to process "Will Call" orders, allow sufficient lead time for special and custom-made items, and most important, to let us know if there is a problem of any kind.

Transportation of Hazardous Materials

A. Hazardous Materials cannot be shipped by air.

B. Hazardous Materials Shipped by UPS Ground Service require special processing and labeling and are subject to a special UPS handling charge.

C. Customers will be notified if the product being ordered is considered hazardous material. Some of the most common items classified as hazardous by the DOT are: compressed air and oxygen (for breathing equipment), test gas kits and cylinders, fusee flares and dry chemical fire extinguishers. Other products may be included as the DOT regulates.

Paint, Marking, Sealants & Adhesives



| | |
|---|-------|
| Marking Paints & Applicators | 2 |
| Paints and Applicators | 3 |
| Maintenance - Repairs - Operations (MRO) | 4 |
| Pencils, Crayons, Markers | 5 |
| Marking Tapes, Chalks, Reels & Line | 6 |
| Premium-Grade & Gutter Sealants | 7 |
| Metal Roof Sealants | 8 |
| Color Matching | 9-10 |
| Caulks, Foam Sealants, Dispensing Unit & Cleaner | 11 |
| SubFloor, Drywall and All Purpose Adhesives | 12 |
| One Component Silicone Sealants & Self Leveling Sealant | 13-14 |
| Caulking Guns | 15 |
| Caulking Guns, Accessories & Wood Glues | 16 |
| Fire Stop Products | 17 |

MARKING PAINTS & APPLICATORS



Survey Marking Paint

20 oz. Aerosol Cans - 12/cs

Non-freezing formula, operating to 14°F (-10°C)

| Part No. | Color | Part No. | Color |
|----------|--------|----------|---------------------|
| ARV-201 | Red | ARV-220 | Fluorescent Red |
| ARV-204 | Green | ARV-222 | Fluorescent Orange |
| ARV-203 | Blue | ARV-224 | Fluorescent Green |
| ARV-212 | Purple | ARV-226 | Fluorescent Yellow |
| ARV-207 | White | ARV-227 | Fluorescent Blue |
| ARV-206 | Black | ARV-229 | Fluorescent Pink |
| ARV-210 | Silver | ARV-230 | Fluorescent Red/Org |



Clear Marking Coat - Chalk Line Saver

20 oz. Aerosol Cans - 12/cs
ARV-200



Construction Marking Paint -

High Quality - lasting up to 3 months
Meets standards set by OSHA and
APWA/ONE Call Systems

| Part No. | Color | Description |
|----------|-------|--------------------------------|
| ARV-255 | White | 20 oz. Aerosol Cans - 12/cs |
| ARV-256 | Red | |



Marking Paints - Patented, Water-Based Formula Marks on any surface

| Part No. | Color | Description |
|----------|--------|--------------------------------|
| ARV-290 | Blue | 20 oz. Aerosol Cans - 12/cs |
| ARV-291 | White | |
| ARV-292 | Red | |
| ARV-293 | Yellow | |



Semi-Gloss Spray Paints -

Zynolyte® Speed E-Name!™ Paint
Interior and Exterior Use - Fast Drying

| Part No. | Color | Description |
|----------|--------------|--------------------------------|
| ARV-275 | White | 16 oz. Aerosol Cans - 12/cs |
| ARV-277 | Black | |
| ARV-308 | Silver Metal | |
| ARV-471 | Royal Blue | |

Tree Marking Paints -

Meets ALL Forestry Industry Requirements

| Part No. | Color | Description |
|----------|--------|---|
| ARV-610 | Red | Fast Drying 16 oz. Aerosol Cans - 12/cs |
| ARV-620 | Orange | |
| ARV-630 | Yellow | |
| ARV-650 | Blue | |
| ARV-670 | White | |



Spot Marker

Marking Stick

Marking Paint Applicators

| Part Number | Description |
|-------------|-----------------|
| ARV-1244 | Spot Marker 10" |
| ARV-1245 | Marking Stick |

PAINTS & APPLICATORS



MultiPurpose Primer -
20 oz. Aerosol Cans -
12/case

| Part No. | Color |
|-----------|-----------|
| ARV-Z8027 | Gray |
| ARV-Z8074 | Red Oxide |
| ARV-Z8076 | White |



Rust Proof Spray Paints -
HQ Industrial Maintenance Enamel
Coating - Protects Against Corrosion,
Light Abrasion, Weathering and
Mild Chemical Fumes

| Part No. | Color | Description |
|----------|--------------|--------------------------------------|
| ARV-304 | Safety Green | 16 oz. Aerosol Cans - 12/cs |
| ARV-307 | Safety White | |
| ARV-309 | Aluminum | |
| ARV-310 | Silver | |
| ARV-312 | Flat Black | |
| ARV-313 | Flat White | |

Rebar Green Coating
High Performance Epoxy
Coating to Protect Rebar
ARV-156



Cold Galvanized Coating
93% Zinc Rich
ARV-7007 - 16 oz. Spray
ARV-700G - 1 Gallon



Traffic Striping Paints
Water Based — Fast Drying
VOC Compliant and Lead Free



| Part No. | Color | Size |
|-----------|--------|----------|
| ARV-790G | White | 1 Gallon |
| ARV-7905G | White | 5 Gallon |
| ARV-791G | Yellow | 1 Gallon |
| ARV-7915G | Yellow | 5 Gallon |
| ARV-792G | Blue | 1 Gallon |
| ARV-7925G | Blue | 5 Gallon |



**Bright Galvanized
Coating Spray**
Restores Galvanized Surfaces
65% Zinc Rich
ARV-7008

Traffic Striping Paints
Solvent Based — Fast Drying
VOC Compliant and Lead Free

| Part No. | Color | Size |
|-----------|--------|----------|
| ARV-710 | White | 20 oz. |
| ARV-710G | White | 1 Gallon |
| ARV-7105G | White | 5 Gallon |
| ARV-720 | Yellow | 20 oz. |
| ARV-720G | Yellow | 1 Gallon |
| ARV-7205G | Yellow | 5 Gallon |
| ARV-730 | Red | 20 oz. |
| ARV-7305G | Red | 5 Gallon |
| ARV-7505G | Blue | 5 Gallon |
| ARV-770 | Black | 20 oz. |



Vers-A-Striper -
Aerosol Applicator
ARV-800



MAINTENANCE - REPAIR - OPERATIONS (MRO)



Anti-Vandal Spray
Remove Graffiti &
Other Marks
ARV-5062 - 16 oz.



Cleaners and Degreasers

| Part No. | Description | Size |
|-----------|---|--------|
| ARV-5055 | All-Purpose Cleaner - Spray | 16 oz. |
| ARV-5075Q | Biodegradable Multi-Purpose Cleaner/Degreaser | 1 Qt |
| ARV-860 | Industrial Glass Cleaner Foam Spray | 20 oz. |
| ARV-8260 | Off-Line Heavy Duty Citrus Cleaner Spray | 20 oz. |
| ARV-399 | Lfp Cleaner/Degreaser w/Low Flashpoint Spray | 20 oz. |
| ARV-592 | Non-Corrosive Brake & Parts Cleaner/Degreaser Spray | 20 oz. |



Lubricants and Penetrants

| Part No. | Description | Size |
|----------|---|-------|
| ARV-8034 | Silicone Lubricant | 16 oz |
| ARV-937 | Tef-Lube™ Lubricant | 16 oz |
| ARV-7340 | All-4 - Cleans, Penetrates, Lubricates & Protects | 16 oz |
| ARV-6030 | Penetrating Oil - Loosens Rust & Corrosion | 16 oz |

Anti-Seize Compounds
Lubricates & Protects Metals
from Corrosion & Seizure
16 oz. Sprays

ARV-9105
ARV-9120




Adjustable Sprayer
22 oz. - Hand Operated
ARV-2310

Adhesive Sprays
20 oz. Cans

ARV-8177 - Industrial
ARV-8178 - EPS Foam/Concrete
ARV-8190 - Hi-Strength



PENCILS, CRAYONS, MARKERS

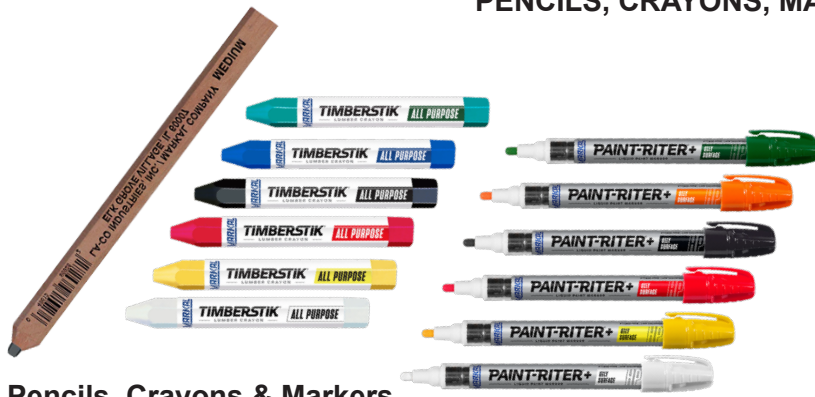

Pencils, Crayons & Markers

| Part No. | Description |
|--------------|--|
| MKL-096928 | Carpenters Pencil - Black |
| LP72R | Carpenter Pencil - Red |
| MKL-0803(xx) | Lumber Crayons - (50) White, (51) Yellow, (52) Red, (53) Black, (55) Blue, (56) Green, |
| MKL-0969(xx) | Felt-Tip Paint Marker - (60) White, (61) Yellow, (62) Red, (63) Black, (64) Orange, (66) Green |

Permanent Markers

| Part No. | Description | Color |
|------------|-------------------|-------|
| MKL-096022 | Fine Point Marker | Red |
| MKL-096023 | Fine Point Marker | Black |
| MKL-096222 | King Sz Marker | Red |
| MKL-096223 | King Sz Marker | Black |
| MKL-096917 | Magnum Marker | Black |



Felt Fine Tip Paint Marker

| Part No. | Description | Color |
|------------|---------------|-------|
| MKL-096871 | Pro-Line Fine | White |



Solid Paint Markers - All Purpose

| Part No. | Description | Color |
|------------|----------------|-------|
| MKL-061051 | Quik-Stik | White |
| MKL-061126 | Quik-Stik Mini | White |



Solid Paint Markers - For Oily Surfaces

| Part No. | Description | Color |
|------------|----------------|--------|
| MKL-028770 | Quik-Stik Mini | White |
| MKL-028771 | Quik-Stik Mini | Yellow |
| MKL-028772 | Quik-Stik Mini | Red |



Solid Stick Paint Markers

| Part No. | Description | Color |
|------------|-------------|--------|
| MKL-080220 | PaintStik B | White |
| MKL-080221 | PaintStik B | Yellow |
| MKL-080222 | PaintStik B | Red |
| MKL-080223 | PaintStik B | Black |
| MKL-080224 | PaintStik B | Orange |



Replacement Nib Tip MKL-096908

ST.2100 Tube Markers - Metal-Ball Tip - aluminum squeeze tube

| Part No. | Description | Color |
|------------|-------------|-------|
| MKL-097150 | 2mm (5/64) | White |
| MKL-097160 | 3mm (1/8) | White |
| MKL-097170 | 6 mm (3/16) | White |



Inspection Paint Markers - Quick Dry - Tamperproof

| Part No. | Description | Color |
|-----------|----------------|--------|
| MKL-09668 | Security Check | White |
| MKL-09669 | Security Check | Yellow |



Ball Tip Paint Markers

| Part No. | Description | Color |
|------------|---------------|--------|
| MKL-096640 | 5/64 Ball Tip | Black |
| MKL-096652 | 1/8 Ball Tip | White |
| MKL-096653 | 1/8 Ball Tip | Yellow |



MARKING TAPES, CHALK, REELS & LINE

Flagging Tape

1-3/16" x 300' Ft Flagging Tape



| Part No. | Color |
|----------|------------|
| FTGL | Glo Lime |
| FTGO | Glo Orange |
| FTGP | Glo Pink |
| FTGR | Glo Red |
| FTB | Blue |
| FTO | Orange |
| FTR | Red |
| FTY | Yellow |
| FTG | Green |
| FTW | White |



Vinyl Electrical Marking Tapes

10 rolls per sleeve

| Part Number | Color | Size |
|-------------|--------|--------------|
| V0W-ET-70YL | Yellow | 3/4" X 68 yd |
| V0W-ET-70WT | White | 3/4" X 68 yd |
| V0W-ET-70RD | Red | 3/4" X 68 yd |
| V0W-ET-70OR | Orange | 3/4" X 68 yd |
| V0W-ET-70GR | Green | 3/4" X 68 yd |
| V0W-ET-70BL | Blue | 3/4" X 68 yd |
| V0W-ET-70BK | Black | 3/4" X 68 yd |
| V0W-ET-70GY | Grey | 3/4" X 68 yd |
| V0W-ET-70BR | Brown | 3/4" X 68 yd |

Chalk

Straight Line Chalk in a variety of colors
Yellow, Red, Blue, White & Fluorescent Orange



Chalk Straight Line Chalk in a variety of colors

| Part No. | Size | Description |
|------------|-------|--------------------|
| IRW-CH8B | 8 oz. | Blue |
| IRW-CH8R | | Red |
| IRW-CH8Y | | Yellow |
| IRW-CH8W | | White |
| IRW-CH8GO | | Fluorescent Orange |
| IRW-CH105B | 5 lb. | Blue |
| IRW-CH105R | | Red |
| IRW-CH105Y | | Yellow |
| IRW-CH105W | | White |
| IRW-CH105O | | Fluorescent Orange |



Chalk Lines

| Part No. | Description |
|-------------|--|
| IRW-1932872 | 100 Ft Aluminum Chalk Line Reel (1:1 Gear Ratio) |
| G150BOLD | Little Giant Chalk Line Reel with 2.0mm braided line |

Braided Nylon Mason Line



| Part Number | Color | Description Size |
|-------------|--------|------------------|
| YB250 | Yellow | #18 X 250 ft. |
| YB500 | Yellow | #18 X 500 ft. |
| OB250 | Orange | #18 X 250 ft. |
| OB500 | Orange | #18 X 500 ft. |
| PB250 | Pink | #18 X 250 ft. |
| PB500 | Pink | #18 X 500 ft. |

WEATHERMASTER SEALANT



A premium-grade, superior polymer formula that offers unbeatable adhesion to wood, vinyl siding, masonry, PVC, fiber-cement siding/trim and most common building materials. It can be extruded in low temperatures, remains permanently flexible with zero shrinkage, adheres well to damp surfaces and provides a weatherproof seal against the elements. Available in over 200 colors, WeatherMaster matches today's most popular siding colors, regardless of the material or manufacturer. When touch-ups are needed, this sealant can be painted within one hour with water-based paint.

FEATURES & BENEFITS

- Ideal for: sealing windows, doors, shutters, exterior trim, siding, gutters and vents.
- Seals: siding, windows, doors, pvc, glass, fiberglass, masonry, wood and most common building materials.
- Joint movement capability \pm 50%
- Superior polymer technology
- Applies in extreme weather conditions
- Fills gaps up to 1 inch wide
- Remains flexible - will not crack
- Uv-resistant
- Paintable in one hour*
- Voc-compliant
- Mold and mildew resistant
- Compatible with all types of foam

WeatherMaster Gutter & Seam Sealant

is a long-lasting, superior polymer sealant that maintains resiliency and flexibility. It provides a highly weather-resistant seal against water, wind, dust and dirt. It is designed to expand and contract with the change of weather and will not crack.

| Number | Color | Size | #/Cs |
|--------|---------------|------|------|
| TB7321 | White | 9.5 | 12 |
| TB7331 | Aluminum Gray | 9.5 | 12 |



| Number | Color | Size | #/Cs |
|---------|--------|------|------|
| TB44001 | White | 9.5 | 12 |
| TB44031 | Black | 9.5 | 12 |
| TB44051 | Bronze | 9.5 | 12 |
| TB44061 | Bronze | 9.5 | 12 |
| TB44231 | Brown | 9.5 | 12 |
| TB45501 | White | 9.5 | 12 |
| TB45531 | Blue | 9.5 | 12 |
| TB5551 | Beige | 9.5 | 12 |
| TB45591 | Gray | 9.5 | 12 |
| TB45841 | Gray | 9.5 | 12 |
| TB46031 | Beige | 9.5 | 12 |
| TB46361 | Beige | 9.5 | 12 |
| TB46471 | Beige | 9.5 | 12 |
| TB46491 | Brown | 9.5 | 12 |
| TB46661 | Gray | 9.5 | 12 |
| TB46681 | Gray | 9.5 | 12 |
| TB46751 | Gray | 9.5 | 12 |
| TB46791 | Gray | 9.5 | 12 |
| TB46861 | Gray | 9.5 | 12 |
| TB46881 | Gray | 9.5 | 12 |
| TB49221 | Green | 9.5 | 12 |
| TB49291 | Green | 9.5 | 12 |
| TB49371 | Green | 9.5 | 12 |
| TB49421 | Blue | 9.5 | 12 |
| TB49551 | Blue | 9.5 | 12 |
| TB49581 | Bronze | 9.5 | 12 |
| TB49701 | Red | 9.5 | 12 |

WEATHERMASTER METAL ROOF SEALANT

| Number | (Firestone) Color | Size | #/Cs |
|---------|------------------------------|------|------|
| TB61001 | White | 9.5 | 12 |
| TB61021 | (Bone White) White | 9.5 | 12 |
| TB61031 | (Stone White) White | 9.5 | 12 |
| TB61041 | (Solar White) White | 9.5 | 12 |
| TB61111 | Translucent | 9.5 | 12 |
| TB61121 | (Matte Black) Black | 9.5 | 12 |
| TB61201 | (Mansard Brown) Brown | 9.5 | 12 |
| TB61331 | (Xtra Dark Brown) Bronze | 9.5 | 12 |
| TB61351 | (Medium Bronze) Bronze | 9.5 | 12 |
| TB61431 | (Brandywine) Red | 9.5 | 12 |
| TB61441 | (Colonial Red) Red | 9.5 | 12 |
| TB61451 | (Terra Cotta) Red | 9.5 | 12 |
| TB61461 | (Regal Red) Red | 9.5 | 12 |
| TB61591 | (Almond) Beige | 9.5 | 12 |
| TB61601 | (Sandstone) Beige | 9.5 | 12 |
| TB61621 | (Sierra Tan) Beige | 9.5 | 12 |
| TB61781 | (Hartford Green) Green | 9.5 | 12 |
| TB61791 | (Hemlock Green) Green | 9.5 | 12 |
| TB61801 | (Patina Green) Green | 9.5 | 12 |
| TB61811 | (Teal) Green | 9.5 | 12 |
| TB61821 | (Sherwood Green) Green | 9.5 | 12 |
| TB61841 | (Dark Ivy) Green | 9.5 | 12 |
| TB61881 | (Tropical Patina) Green | 9.5 | 12 |
| TB62061 | (Champagne Metallic) Clay | 9.5 | 12 |
| TB62211 | (Regal Blue) Blue | 9.5 | 12 |
| TB62221 | (Award / Electric Blue) Blue | 9.5 | 12 |
| TB62241 | (Sky Blue) Blue | 9.5 | 12 |
| TB62421 | (Slate Gray) Gray | 9.5 | 12 |
| TB62451 | (Charcoal Gray) Gray | 9.5 | 12 |
| TB62491 | (Cityscape) Gray | 9.5 | 12 |
| TB62611 | (Silver Metallic) Silver | 9.5 | 12 |
| TB62621 | (Classic Copper) Copper | 9.5 | 12 |
| TB63991 | Clear | 9.5 | 12 |



A premium-grade, superior polymer formula that offers unbeatable adhesion to all metals including Kynar™ coated metals, aluminum, galvanized steel, copper and most common building materials. It can be extruded in extreme temperatures, remains permanently flexible and will not shrink, adheres well to wet and damp surfaces and is dust and dirt resistant.
















FEATURES & BENEFITS

- » Ideal for: sealing metal roofs, windows, doors, siding, gutters and vents.
- » Seals: kynar™ coated metals, aluminum, galvanized steel, copper, pvc, wood, concrete, masonry, Stucco, wall panels, vinyl, glass, plastic, siding, flashing, sheet metal and most common building materials.
- » Outperforms silicone, tripolymer and urethane sealants
- » Applies in extreme weather conditions
- » Joint movement capability ± 50%
- » Permanently flexible – will not crack
- » Uv-resistant
- » Voc-compliant
- » Compatible with all types of foam
- » Approved for use on buildings in both Miami-Dade county and throughout the country

SEE PAGES 8-9 FOR COLOR MATCHING

VIKING















Industrial Center

| WeatherMaster Metal Roof Sealant | → | Firestone |
|----------------------------------|---|--------------------|
| BEIGE (61591) |  | ALMOND |
| BLUE (62221) |  | AWARD BLUE |
| WHITE (61021) |  | BONE WHITE |
| RED (61431) |  | BRANDYWINE |
| CLAY (62061) |  | CHAMPAGNE METALLIC |
| GRAY (62451) |  | CHARCOAL GRAY |
| GRAY (62491) |  | CITYSCAPE |
| MISC - COPPER (62621) |  | CLASSIC COPPER |
| RED (61441) |  | COLONIAL RED |
| BRONZE (61331) |  | DARK BRONZE |
| GREEN (61841) |  | DARK IVY |
| BLUE (62221) |  | ELECTRIC BLUE |
| BRONZE (61331) |  | EXTRA DARK BROWN |
| GREEN (61781) |  | HARTFORD GREEN |
| GREEN (61791) |  | HEMLOCK GREEN |

WeatherMaster Metal Roof Sealant



Firestone

| | | |
|-----------------------|---|-----------------|
| BROWN (61201) |  | MANSARD BROWN |
| BLACK (61121) |  | MATTE BLACK |
| BRONZE (61351) |  | MEDIUM BRONZE |
| GREEN (61801) |  | PATINA GREEN |
| BLUE (62211) |  | REGAL BLUE |
| RED (61461) |  | REGAL RED |
| BEIGE (61601) |  | SANDSTONE |
| GREEN (61821) |  | SHERWOOD GREEN |
| BEIGE (61621) |  | SIERRA TAN |
| MISC - SILVER (62611) |  | SILVER METALLIC |
| BLUE (62241) |  | SKY BLUE |
| GRAY (62421) |  | SLATE GRAY |
| WHITE (61041) |  | SOLAR WHITE |
| WHITE (61031) |  | STONE WHITE |
| GREEN (61811) |  | TEAL |
| RED (61451) |  | TERRA COTTA |
| GREEN (61881) |  | TROPICAL PATINA |

OTHER COLOR MATCHING AVAILABLE
PLEASE CONTACT US

SEALANTS



Titebond Pro-Grade Plus Caulk is a multi-purpose, siliconized acrylic latex caulk for interior and exterior use. This easy-to-use formula dries quickly, will not cause shiners and cleans up with water. It offers great weather-resistance, has a water resistant seal once cured, tools easily and can be painted in 2 hours. It contains no plasticizers or phthalates and offers unbeatable adhesion to most common building materials including wood, metal, glass, tile and more.

| Number | Color | Size | #/Cs |
|---------------|---------------|------|------|
| TB8401 | White | 10.1 | 12 |
| TB8411 | Almond | 10.1 | 12 |
| TB8431 | Clear | 10.1 | 12 |
| TB8471 | Antique White | 10.1 | 12 |



Titebond WeatherMaster X-TREME Multi-Purpose foam is a triple expansion, low pressure, one-component polyurethane foam sealant. It is moisture-cured and designed to seal and fill small cracks and voids. This product creates a tight barrier against noise, moisture and infiltration – even in X-TREME temperatures.

| Number | Size | #/Cs |
|---------------|--------|------|
| TB8521 | 12 oz. | 12 |
| TB8522 | 24 oz. | 12 |



Titebond WeatherMaster X-TREME Window & Door low pressure one-component polyurethane foam sealant is a high yield, closed cell, low pressure build window and door foam sealant. It complies with AAMA 812 and will not bow or distort windows or doors. X-TREME Window & Door is designed to resist moisture and mold problems.

| Number | Size | #/Cs |
|---------------|--------|------|
| TB8531 | 12 oz. | 12 |
| TB8532 | 24 oz. | 12 |



Titebond WeatherMaster X-TREME Dispensing Unit is a durable intermediate dispensing unit designed for frequent use by the professional contractor. It allows for adjustable bead control, is solvent resistant and includes a non-stick teflonized basket and needle valve. It is designed to work with WeatherMaster X-TREME Foams.

TB17862



Titebond WeatherMaster X-TREME Multi-Purpose Cleaner is designed to clean up WeatherMaster X-TREME foam sealants. This product is an acetone cleaner and is not meant to be used on surfaces that are not solvent or acetone resistant. The Cleaner is a spray solvent used to dissolve uncured foam. X-TREME Cleaner can also be attached to the WeatherMaster X-TREME Dispensing Unit, allowing it to be flushed and kept clean and operable.

| Number | Size | #/Cs |
|---------------|--------|------|
| TB8551 | 12 oz. | 12 |

ADHESIVES

Titebond Contractor Grade Water-Based Subfloor Adhesive

is a professional-strength formula that is specifically designed for subfloor installations and general plywood use. It provides a permanent bond that remains flexible, reduces nailing and helps prevent squeaky floors. The VOC-compliant, nonflammable formula is environmentally safe – emitting no harmful fumes and promoting healthy living and working environments.

| Number | Type | Size | #/Cs |
|---------------|--------------|------|------|
| TB7282 | Water -Based | 28 | 12 |



SUBFLOOR CONSTRUCTION ADHESIVES

are professional strength formulas that are specifically designed for subfloor installations and general plywood use. They provide a permanent bond that remains flexible, reduces nailing and prevents squeaky floors. They offer a strong initial tack and excellent bond strength. They are covered under the 25 Year Silver Subfloor Warranty against subfloor squeaks and pops.



Titebond PROvantage Subfloor Construction Adhesive

| Number | Type | Size | #/Cs |
|---------------|------------|------|------|
| TB5481 | PROvantage | 10 | 12 |
| TB5482 | PROvantage | 28 | 12 |

Titebond Solvent-Based Subfloor Construction Adhesive

| Number | Type | Size | #/Cs |
|---------------|---------------|------|------|
| TB5491 | Solvent-Based | 10 | 12 |
| TB5492 | Solvent-Based | 28 | 12 |

Titebond Drywall Construction Adhesive

is specifically designed for installing drywall and paneling to most common building materials including wood and metal studs. It offers excellent adhesion, reduces nail pops and provides a “no sag” installation.

| Number | Type | Size | #/Cs |
|---------------|---------|------|------|
| TB5352 | Drywall | 28 | 12 |



Titebond All Purpose Construction Adhesive

is a versatile formula designed for general purpose interior and exterior applications that bonds common building materials. It is highly water-resistant and offers a longer working time for precise assembly while remaining permanently flexible.

| Number | Type | Size | #/Cs |
|---------------|-----------------|------|------|
| TB3451 | General Purpose | 10 | 12 |
| TB3452 | General Purpose | 28 | 12 |



One-Component Silicone Sealants

SIL-BOND RTV 4500 HIGH STRENGTH

Sil-Bond (RTV 4500) is a room temperature vulcanizing RTV acetoxy cure silicone sealant and adhesive. Provides chemically formulated for high strength adhesion. VOC compliant formula offers UV stability and excellent adhesion to form waterproof and airtight bonds, when fully cured. Bonds to steel, tile, fiberglass, ceramic, glass, aluminum, painted surfaces, wood, plywood, marble, plus many other common substrates. Great performance in all weather situations Meets today's Green Building Standards.



Meets Specifications:

ASTM C920 Type S, Grade NS, Class 25
TT-S00230C, TT-S-01543A, MIL-A-46106A
FDA CFR 177.2600, USDA Approved,
NSF51, UL Recognized Component

Features & Benefits:

- High Strength
- Excellent Weatherability
- UV Stable
- Non-Yellowing
- VOC Compliant
- Non-Flammable
- Waterproof
- Excellent Adhesion
- Non-Shrinking

Applications:

- Sealing & Glazing
- HVAC/R
- Plumbing
- Roofing
- Kitchen & Bath
- Countertops
- Sanitary Seals
- Precast Concrete
- Interior/Exterior

| Cat. No. | Color | Size | #/Cs |
|----------------------|----------|---------|------|
| RTV4500ALMOND | Almond | 10.3 oz | 24 |
| RTV4500ALUM | Aluminum | 10.3 oz | 24 |
| RTV4500BLACK | Black | 10.3 oz | 24 |
| RTV4500BRONZE | Bronze | 10.3 oz | 24 |
| RTV4500CLEAR | Clear | 10.3 oz | 24 |
| RTV4500GRAY | Gray | 10.3 oz | 24 |
| RTV4500WHITE | White | 10.3 oz | 24 |

Features & Benefits:

- High Temperature Performance
- Excellent Weatherability
- UV Stable
- Non-Yellowing
- VOC Compliant
- Non-Flammable
- Waterproof
- Excellent Adhesion
- Non-Shrinking

Applications:

- Sealing & Glazing
- HVAC/R
- Plumbing
- Roofing
- Kitchen & Bath
- Furnace & Fireplace
- Flutes & Venting
- Transportation Seals
- Interior/Exterior

Meets Specifications:

ASTM C920 Type S, Grade NS, Class 25
TT-S00230C (COM-NBS), TT-S-01543A (COM-NBS),
MIL-A-46106A, FDA CFR 177.2600, USDA Approved,
NSF51, UL Recognized Component

SIL-BOND RTV 6500 HIGH TEMPERATURE

Sil-Bond (RTV 6500) is a premium high temperature, room temperature vulcanizing RTV acetoxy cure silicone sealant and adhesive. The VOC compliant formula offers tenacious adhesion to form waterproof and airtight bonds to material in high temperature scenarios. Bonds to metal, steel, tile, ceramic, glass, aluminum, painted surfaces, marble and many other common substrates. Great performance in all weather situations.

Meets today's Green Building Standards.



| Cat. No. | Color | Size | #/Cs |
|-------------------|-------|---------|------|
| RTV6500RED | Red | 10.3 oz | 24 |

SIL-FLEX RTV 7500 MULTI-SURFACE

Sil-Flex (RTV 7500) is a low modulus, neutral cure silicone sealant and adhesive that bonds to a wide range of building materials. The VOC compliant formula offers tenacious adhesion that bonds to pvc, concrete, glass, aluminum, painted surfaces, wood, plywood, stucco, building paper, window wrap, fiber cement, brick, stone, steel, ceramic, porcelain, masonry and many other common material surfaces. Great performance in all weather situations. Meets today's Green Building Standards.



| Cat. No. | Color | Size | #/Cs |
|----------------------|--------|---------|------|
| RTV7500ALMOND | Almond | 10.3 oz | 24 |
| RTV7500WHITE | White | 10.3 oz | 24 |

Features & Benefits:

- Multi-Surface
- Excellent Adhesion
- Non-Corrosive
- Low Odor
- 50% Movement Capability
- Permanent Flexibility
- Excellent Weatherability
- Long Life
- VOC Compliant
- Non-Flammable
- Waterproof

Applications:

- Sealing Openings & Exterior Surfaces
- HVAC/R
- Plumbing
- Roofing
- Kitchen & Bath
- Countertops
- Sanitary Seals
- Precast Concrete
- Industrial Gaskets
- Interior/Exterior

Meets Specifications:

ASTM C920 Type S, Grade NS, Class 50
TT-S00230C, TT-S-01543A, MIL-A-46106A,
AAMA 808.3, 805.2, 803.3 (Type I, 802.3
(Type II), UL Recognized Component

One-Component Silicone Sealants



Tremco® Vulkem® 116 Textured Single-Component Polyurethane Sealant

Vulkem® 116 is a textured, single-component, moisture-curing, gun-grade polyurethane sealant. It is a general-purpose sealant designed for use on poured and precast concrete, masonry work, window and door perimeters, and similar types of construction joints. Approved for exterior use only. Technical Data: Conforms to ASTM C920 Type S, Grade NS, use NT, M, A, I class II, and O. U.S. Federal Specification TT-S-00230C, Class A, Type II, CAN/CGSB-19.13-M87, USDA regulation for indirect food contact, Canadian Food Inspection Agency and City of Los Angeles (COLA) approved standards.

| Cat. No. | Color | Size | #/Cs |
|---------------------|--------------|---------|------|
| VULALMOND | Almond | 10.1 oz | 30 |
| VULBLACK | Black | 10.1 oz | 30 |
| VULBRONZE | Bronze | 10.1 oz | 30 |
| VULBUFF | Buff | 10.1 oz | 30 |
| VULDBRONZE | Dark Bronze | 10.1 oz | 30 |
| VULGRAY | Gray | 10.1 oz | 30 |
| VULLIMESTONE | Limestone | 10.1 oz | 30 |
| VULNCLAY | Natural Clay | 10.1 oz | 30 |
| VULREDTAN | Redwood Tan | 10.1 oz | 30 |
| VULWHITE | White | 10.1 oz | 30 |

Sikaflex®-1c SL Self-Leveling Sealant

Single component, self-leveling, premium-grade polyurethane sealant

Sikaflex-1c SL is a low-modulus, high performance, 1-component, polyurethane-based sealant with an accelerated curing capacity. It can be used in concrete joint 24 hours after the concrete is poured and also in damp concrete applications. Meets Federal Specification TT-S-00230C, Type I, Class A. Meets ASTM C-920, Type S, Grade P, Class 25, use T, M, G, I



Features:

- High Performance, One Component Material
- Used to Seal Horizontal Joints
- No Mixing/No Tooling
- Pourable
- Permanently Elastic
- Excellent Adhesion
- Paintable, Sandable, Stainable and Waterproof
- Meets ASTM C-920
- Covers 70 Lineal Feet by 1/4" Joint

Sikaflex Semi-Textured Sealant

| Part Number | Size | #/Cs |
|----------------------|--------|------|
| SIKASELFLEVEL | 29 oz. | 12 |

Use on Driveways, Garage Floors, Sidewalks, Balconies, Pavements, Patios, Steps, Basements and Warehouses



CAULKING GUNS

Drip-Free Series

CG10Z06:1



CG10ZADJ



Duracore Series



CG10Z18:1
CG29OZ18:1



CG13OZ26:1



CG20OZ18:1OR

Multi-Purpose Series



CG10OZ10:1EZ



CG20OZADJ
Sausage Caulk Gun



CG10OZ10:1



CG29OZ10:1



CG10OZ10:1GTS

G Series



CG10Z12:1
CG10Z26:1

Specialty Series



CG29OZ10:1XT
X-T Caulk Gun

CAULKING GUN ACCESSORIES



CBUDDY
Caulk Buddy



CGPCYEL
Plastic Cone



POCKETSLIXBLK
Pocket Slix

ASLICK1
Slick-1 Set



RPWB50509
Caulk Warming Bag Jr



RPWB60908
Caulk Warming Bag



RP0609PLWC
Cylinder Wrap



SPT03P
Tapered Spatula
3" x 3/8" - 5/8"



Straight Spatulas

| Cat. No. | Size |
|----------|--------------|
| SPT03S | 3" x 5/8" |
| SPT04S | 4" x 3/4" |
| SPT05S | 5" x 3/4" |
| SPT06S | 6" x 3/4" |
| SPT08S | 8" x 1" |
| SPT10S | 10" x 1-1/2" |

WOOD GLUES

Titebond® Original Wood Glue

The industry standard for woodworking, this original aliphatic resin glue has been used by craftsmen and furniture manufacturers for over 50 years. It provides a strong initial tack and fast speed of set to reduce clamp time. It develops a bond stronger than the wood itself, offers excellent sandability and is unaffected by finishes. Ideal for wood, hardboard, particleboard, leather, cloth and most other porous materials. It is easy to use, nontoxic and cleans up with water. Conforms to the requirements of ASTM D4236.

| Cat. No. | Size | #/Cs |
|----------|---------------|------|
| 5064 | 16 oz. Bottle | 12 |
| 5066 | 1 Gallon Jug | 2 |

Titebond® II Premium Wood Glue

The first leading brand, one-part wood glue that passes the ANSI Type II water-resistance specification. It offers excellent heat-resistance, strong initial tack, fast speed of set and forms a bond stronger than the wood itself. It resists solvents, heat and water, and sands easily without softening. It is paintable, solvent free and nontoxic. Ideal for exterior woodworking projects, including outdoor furniture, birdhouses, mailboxes, planters and picnic tables. FDA approved for indirect food contact (cutting boards).

Franklin International

© 2004 Franklin International. All rights reserved.



| Cat. No. | Size | #/Cs |
|----------|---------------|------|
| 5004 | 16 oz. Bottle | 12 |



Metacaulk® Intumescent Firestop Sealants



- UL Classified systems up to 4 hours
- Highly intumescent
- VOC compliant
- Excellent freeze-thaw
- For interior use - Paintable
- Meets ASTM E 814, UL 1497 & UL2079 Standards
- STC rating 62



Metacaulk® 1000 is a 1-component, general fire-rated sealant/smoke seal for construction joints & through penetrations. Cures to elastomeric seal suited to dynamic motion. Stops flames/smoke/hot gas/water moving through joints & through penetrations. Non-sag, safe and easy to use with a conventional caulking gun, bulk loading gun or trowel.

Metacaulk® 1000

| Part Number | Size | #/Case |
|-------------|-----------------------|--------|
| MC66312 | 20.2 Oz. Sausage Pack | 12 |
| MC66640 | 10.3 oz Caulk Sealant | 12 |

Metacaulk® 150+ General Purpose Firestop Sealant

Metacaulk® 150+ is a water-based, non-sag caulking grade sealant that is easy to apply as well as to retrofit. It cures to an elastomeric seal that is suitable where dynamic movement is expected.



- Water-based - VOC compliant
- Good freeze-thaw
- For interior use - paintable
- Use for most common applications
- STC rating 51



Metacaulk® 150+

| Part Number | Size | #/ Case |
|-------------|--------------------|---------|
| MC66648 | 10.3 Oz. Cartridge | 24 |

Metacaulk® Firestop Pillows



Firestop Pillows are designed primarily for use in large, temporary or frequently accessed openings with cables, cable trays, blank openings or multiple penetrations.



- Forms a very strong char
- No wire mesh required
- Easy to install - no tools



Metacaulk® Firestop Pillows

| Part Number | Size | #/Case |
|-------------|-----------|--------|
| MC66362 | 2 X 9 X 6 | 10 |
| MC66363 | 3 X 9 X 6 | 10 |

Metacaulk® Putty Sticks & Pads

Putty Sticks are used to seal around penetrating items through fire-rated walls, floors and within blank openings. **Putty Pads** are used to maintain the hourly rating of fire-rated walls containing electrical outlet boxes and to reduce sound transmission. Hand moldable with no curing time.



- Applied by hand
- No asbestos fillers
- Pads - STC rating 60
- For interior use
- Adheres to all common building surfaces



BIOSTOP™ Putty Sticks & Pads

| Part Number | Size | #/Case |
|-------------|------------------|--------|
| MC66335 | 7 X 7 X 1/8 Pads | 20 |
| MC66340 | 6 X 7 X 1/8 Pads | 20 |
| MC66475 | 9 X 9 X 1/8 Pads | 12 |
| MC66345 | 18 Cubic In | 12 |

ORIGINATOR

[Empty box for originator name]



Office (651) 646-6141
Toll Free (800) 328-6505

9205 Lake Drive NE, Columbus MN 55025

Email: info@vikingindustrialcenter.com

APPLICATION FOR CREDIT

Date: _____

COMPANY: _____

Application Requested by: _____

INVOICE TO:

SHIP TO:

(Address/P.O.Box) _____

(Street Address) _____

(City, State & Zip) _____

(City, State & Zip) _____

Phone: _____ Fax: _____

Email: _____

Invoice Preference: Fax _____ Email _____

If your company is Tax Exempt, a copy of the certificate is required.

Years in business: _____

Accounts Payble Contact: _____

Trade References:

Name of Supplier

Phone Number

Fax Number *(required)*

1. _____

2. _____

3. _____

Bank Reference:

Name of Bank _____

Phone Number _____

Contact at Bank _____

Account Number _____

If application is not complete it will not be processed.

The above information is given for the purpose of establishing a line of credit an is a true and correct statement.

Signature

Title

Date

This application must be signed by a corporate officer or authorized representative who thereby grants permission to suppliers to release confidential credit information to Viking Industrial Center.

**Please email completed credit application to:
info@vikingindustrialcenter.com**



ST. PAUL
2550 Kasota Ave
(800) 328-6505

DULUTH
4730 Grand Ave
(800) 232-1367

FOREST LAKE
9205 Lake Drive NE
(651) 756-8758

Safety, Fastener & Strut Specialists

www.vikingindustrialcenter.com

info@vikingindustrialcenter.com

FIRST AID

EYE & FACE PROTECTION

HEAD PROTECTION

HAND PROTECTION

HI VISIBILITY GARMENTS

CONFINED SPACE ENTRY

LOCKOUT/TAGOUT

SURFACE PROTECTION PRODUCTS

REBAR CAPS

HEARING PROTECTION

RESPIRATORY PROTECTION

RAINWEAR & RUBBER BOOTS

FALL PROTECTION

GAS DETECTION

SIGNS

RENTAL EQUIPMENT
GAS MONITORS, TRIPODS, BLOWERS

UNISTRUT & FITTINGS

CONSTRUCTION FASTENERS

THREADED ROD

DUCT, MASKING & PAINTERS TAPE

ROOFING SCREWS

HIGH SPEED & CARBIDE BITS

ADHESIVES & CAULKS

**AUTO FEED SCREW DRIVING
SYSTEMS**

**FOAM SEALANTS & FIRE
STOPPING PRODUCTS**

MARKING PAINT, CHALK

RIVET TOOLS & RIVETS

SECURITY FASTENERS

SAW BLADES

**POWDER ACTUATED TOOLS,
PINS AND LOADS**

ELECTRICAL CORDS & GFCI

POLY SHEETING

**Convenient
Service Center Locations**

ST PAUL

651-646-6374

2550 Kasofa AVE.

DULUTH

218-624-4851

4730 GRAND AVE.

FOREST LAKE

651-756-8758

9205 Lake Drive NE



Twin Cities Metro Area - 800-328-6505

Duluth/Superior Area - 800-232-1367

www.vikingindustrialcenter.com